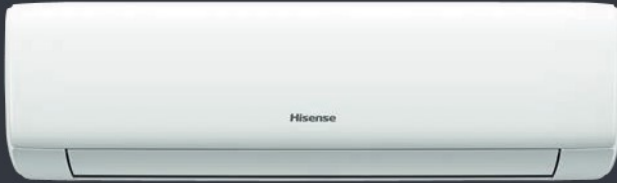



# Technical specifications

## Wings Pro

R32

SCOP  
4


HI-NANO sterilization

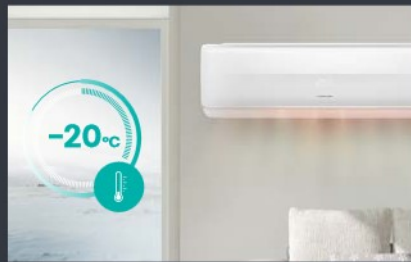

-20°C Low Ambient Heating (-20°C)



Outdoor unit chassis heater

HI-NANO  
Sterilization4-in-1 filter &  
active carbon  
filter

Anti-bacteria Fin



Indoor Self Clean



Antimold



I Feel



Smart Mode



WiFi Control

Comfortable  
Sleep

4D Auto-swing



19 dB



Dimmer



Timer 24 h



Fast Cooling



8 °C heating



Heating at -20 °C



Easy Installation

Easy  
MaintenanceLeft/Right  
DrainingWired Controller  
optionalRoom card  
control optionalOutdoor Unit  
Chasis HeaterEconomy mode  
operationLED Hidden  
Display

3 min Protection



Intelligent Defrost

Model		KB25YR3E	KB35YR3E	KB50XS1E	KB70BT1E
Model name	Indoor Unit	KB25YR3EG	KB35YR3EG	KB50XS1EG	KB70BT1EG
	Outdoor Unit	KB25YR3EW	KB35YR3EW	KB50XS1EW	KB70BT1EW
Model code	Indoor Unit	20003826	20003828	20003829	20003830
	Outdoor Unit	20003856	20003857	20003858	20003859
Cooling Capacity	W	2600 (1000-3000)	3400 (1000-4000)	5000 (1000-6000)	6500 (1600-7200)
Rated Input-Cooling	W	855 (190-1500)	1140 (190-1600)	1540 (260-2300)	2060 (420-2760)
Rated Current Cooling	A	3,9	5	6,9	9,2
Heating Capacity	W	2700 (1000-3000)	3800 (1000-4200)	5600 (1600-6250)	7100 (1800-7300)
Rated Input-Heating	W	700 (190-1500)	1050 (190-1600)	1550 (350-2300)	2150 (395-2700)
Rated Current Heating	A	3,1	4,7	7	9,6
Voltage, Frequency, Phase	V - Hz - Ph	220-240V~, 50Hz, 1P	220-240V~, 50Hz, 1P	220-240V~, 50Hz, 1P	220-240V~, 50Hz, 1P
SEER	Cooling	6,1	6,1	6,1	6,2
SCOP	Heating Average	4	4	4	4
SCOP	Heating Warmer	5,1	5,1	5,1	5,1
Energy Class	Cooling	A++	A++	A++	A++
Energy Class	Heating	A+	A+	A+	A+
Moisture Removal	L/hour	0,9	1,2	2,0	2,2
<b>Air flow</b>					
Air Circulation (H/HM/M/ML/L)	m <sup>3</sup> /h	550	550	880	1100
<b>Noise power/pressure</b>					
Indoor Unit Noise Level - Sound Power	dB (A)	56	56	59	64
Indoor Unit Noise Level - Sound Pressure (H/M-H/M/M-L/L/Qiuet)	dB (A)	39/37/34/32/29/24	39/37/34/32/30/24	44/42/40/37/36/31	45/42/40/38/35/32
Outdoor Unit Noise Level - Sound Power	dB (A)	62	62	63	65
Outdoor Unit Noise Level - Sound Pressure	dB (A)	52	52	53	56
<b>Refrigerant</b>					
Refrigerant	/	R32	R32	R32	R32
Refrigerant charge volume	g	460	580	1150	1320
<b>Connecting Pipe Diameter</b>					
Liquid Pipe	inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	3/8 (9.52)
Gas Pipe	inch (mm)	3/8 (9.52)	3/8 (9.52)	1/2 (12.7)	5/8 (15.87)
Max length of pipe	m	20	20	20	20
Max height difference	m	10	10	15	15
<b>Dimensions</b>					
Net Dimensions - Indoor Unit	mm (WxHxD)	833x256x203	833x256x203	943x300x245	1039x325x237
Net Dimensions - Outdoor Unit	mm (WxHxD)	660x483x240	660x483x240	810x585x280	860x667x310
Net Weight - Indoor Unit	kg	7,7	7,7	10	11,0
Net Weight - Outdoor Unit	kg	21,7	22	34	41
Packing Dimensions - Indoor Unit	mm (WxHxD)	890x320x260	890x320x260	995x365x310	1120x390x315
Packing Dimensions - Outdoor Unit	mm (WxHxD)	780x530x315	780x530x315	940x630x385	995x720x420
Gross Weight - Indoor Unit	kg	9,5	9,5	12	13,5
Gross Weight - Outdoor Unit	kg	25	25	38,5	46
Loading Capacity (20'/40'/40"HC)	sets	150/310/342	150/310/342	86/178/202	66/134/152
<b>Operating temperature</b>					
Operating Temp Range	Cooling (°C)	-15 °C - 43 °C	-15 °C - 43 °C	-15 °C - 43 °C	-15 °C - 43 °C
	Heating (°C)	-20 °C - 24 °C	-20 °C - 24 °C	-20 °C - 24 °C	-20 °C - 24 °C
<b>Useful area</b>					
Max. useful area*	m <sup>2</sup>	14	24	28	38

\* Usable area depends on the building insulation and potential heat sources in the building.